

- Total Color Error goal

13 14 15 16

95% dE = 9

---- Accuracy at Calibration


95% dE = 4


2


Accuracy


17 18 19


dE*ab

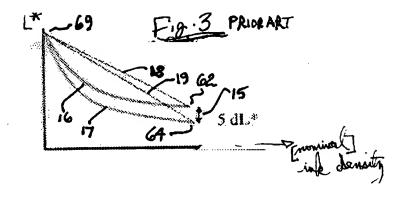








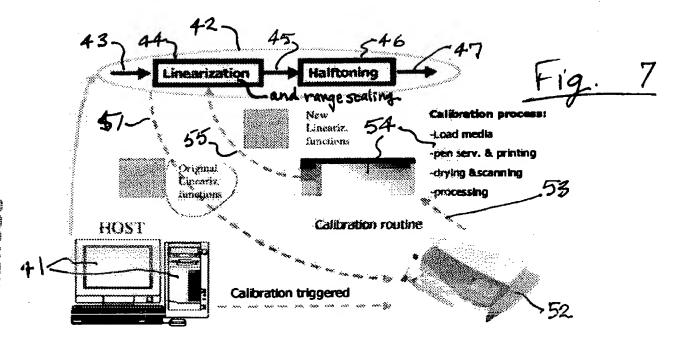

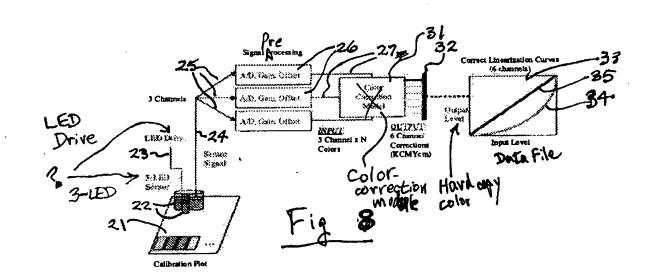

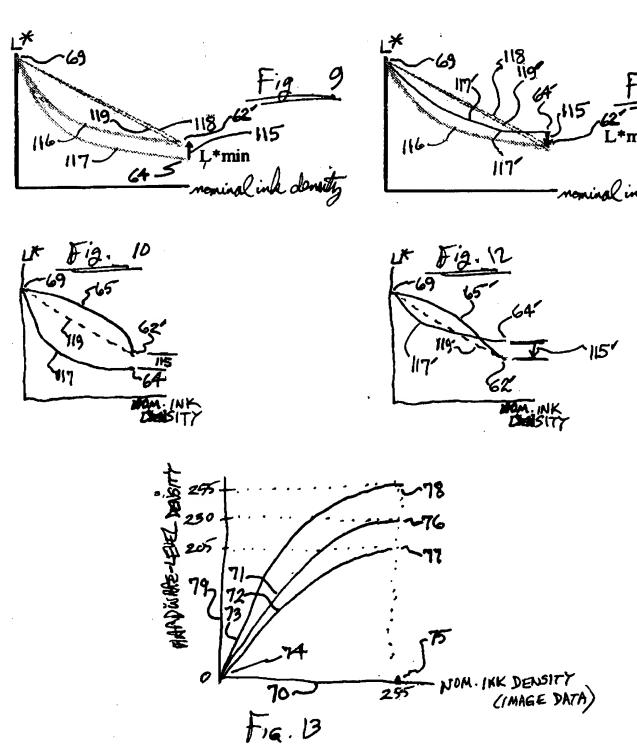


Fig. 14

printing	mode			L*			p*
medium	(passes)	K	כ	Ж	ວ	ш	Ā
coated		0.224	0.538	0.483	1.064	1.064 0.770	0.652
glossy		0.101	0.562	805.0	0.508 1.157	0.759	0.719
heavyweight coated	4, 8 or 12	0.233	0.233 0.561	0.465		1.064 0.762	0.664
semigloss #1		0.145	0.563	0.472	1.124	1.124 0.763 0.679	0.679
semigloss #2		0.063	0.535	0.481	1.124	0.063 0.535 0.481 1.124 0.753 0.691	0.691
404	4 or 8	0.055	0.552	0.484	1.126	0.055 0.552 0.484 1.126 0.749 0.710	0.710
pnoco	12	0.002	0.433	0.401	1.116	0.002 0.433 0.401 1.116 0.667 0.609	0.609